

Features

- Complies with EN54 part 2 and part 4
- 40 fire zone LED indicators
- 2 independent sounder circuits
- 500mA Universal Loop Driver
- Supports Apollo (Xplorer, XP95 and Discovery), Hochiki (ESP), Morley-IAS & System Sensor
- 7 day timers
- Day/Night mode switching
- Onboard monitored inputs
- Programmable user function keys
- Event logging
- Onboard diagnostics
- User access restriction
- All metal enclosure
- Plug-in connectors
- Optional internal printer
- PC configuration software (optional)

The Dimension series of intelligent multi protocol fire alarm control panels from Morley-IAS Fire Systems have been developed based on two concepts - **simplicity and reliability**.

DX2e

2 loop multi protocol
intelligent fire alarm
control panel

Data Sheet

Simply, fix the control panel to the wall, connect the field wiring and everything else is configured in the software. Even programming the control panel is simple. No computer is required and it only takes a few key presses to have a working fire alarm system. First, set the protocol for the loop devices. Second, "Autolearn" the panel and finally, "Reset" the panel. The control panel is now protecting the building.

The Dimension series provides additional features allowing:- programmable text messages to identify the exact location of each field device, a class change input for schools, coincidence and verification detection (false alarm management), sensitivity adjustment (between day and night), programmable function buttons, input/output logic and extensive event logging. A feature rich fire alarm control panel constructed from high specification components to help both the installer and the end user.

The Dimension series is especially suited to offices, retail units, health centres, leisure facilities, cinemas, nursing homes, sheltered housing and hotels to name but a few applications. A compact, high performance, economical fire alarm control panel for the protection of small to medium sized buildings.



Mechanical

Dimensions (H x W x D):

DX1e-20S 245 x 380 x 110 mm
 DX1e-40M 380 x 380 x 130 mm
 DX1e-40MP 380 x 380 x 130 mm

Weight (Excluding batteries):

DX1e-20S(F) 5 Kg DX1e-40M(F) 7 Kg DX1e-40MP(F) 7.2 Kg


Material 1.2mm Zintec powder epoxy coated

Colour RAL 9001 - Cool Grey

Knockouts Top: 19 x M20 Bottom: 3 x M20.

Temperature Operating: 0°C to +45°C Storage: 10°C to +55°C

Relative Humidity 5% to 95% non condensing.

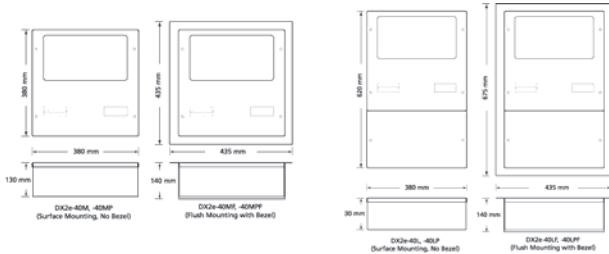

Electrical

Operating voltage 230Vac (+10%, -15%) 50-60 Hz

PSU Rating DX2e-40M(F) 24 Vdc 4A DX2e-40MP(F) 24 Vdc 4A DX2e-40L(F) 24 Vdc 4A DX2e-40LP(F) 24 Vdc 4A

Standby Batteries

DX2e-40M(F) 2 x 7Ahr or 2 x 12Ahr
 DX2e-40MP(F) 2 x 7Ahr or 2 x 12Ahr
 DX2e-40L(F) 2 x 12Ahr or 2 x 17Ahr
 DX2e-40LP(F) 2 x 12Ahr or 2 x 17Ahr

Auxiliary output* +24 Vdc 250mA fused

Loop Capacity** 2 Loops, 500mA, 126 devices Apollo Protocols, 126 devices Hochiki Protocol, 198 devices Morley-IAS Protocol, 198 devices System Sensor Protocol

Output Relays

Fire relay: Single pole changeover 30Vdc 1A
 Fault relay: Single pole changeover 30Vdc 1A
 Aux relay: Programmable single pole changeover 30Vdc 1A

Onboard Inputs Keyswitch: programmable for select functions

Input #1: programmable (monitored) for select functions
 Input #2: programmable (monitored) for select functions

Data Ports

1 x RS 485 (Repeater connections) 1 x RS232 (PC Programming)

Sounder Circuits 2 output circuits, 1A available across both circuits.*

Fire System Compatibility

Morley-IAS is fully committed to offering practical solutions and supporting products that enhance your buildings control systems.

Other Supporting Products Include

- Morley-IAS Intelligent Public Address and Voice Alarm Equipment
- Morley-IAS ZX range of networkable analogue addressable Fire Alarm Panels
- Morley-IAS Dimension Analogue Addressable Panels
- Morley-IAS Horizon Conventional Panels
- Morley-IAS Extinguishing Panels

For further details on these or any other Morley-IAS product please contact your local distribution point, Morley-IAS Regional Sales Manager or via our contact details.

Morley-IAS by Honeywell a real choice for fire solutions, committed to supporting our device partners.



User Interface

Display

2 x 40 character backlit liquid crystal

Control keys

Sound Alarms, Silence/Resound, Mute Buzzer, Accept, Reset.

Programmable keys

2 independent programmable buttons and LED indicators.

Programming keys

12 button alpha numeric key pad and 4 cursor keys.

Indicators

Fire, Fault, Test, Disablement, Delayed Mode, Alarms Silenced, Buzzer Muted, Sounders Disabled, Relays Disabled, Power Supply Fault, CPU Fault, Sounder Fault and Earth Fault.

Zonal

40 Fire zones LED indicators.

Part Numbers

705-004	DX2e-40M 2 loop Fire Alarm Control Panel.
705-024	DX2e-40M-M 2 loop Fire Alarm Control Panel. Morley-IAS Protocol only.
705-005	DX2e-40MP 2 loop Fire Alarm Control Panel with internal printer.
705-006	DX2e-40L 2 loop Fire Alarm Control Panel.
705-026	DX2e-40L-M 2 loop Fire Alarm Control Panel. Morley-IAS Protocol only.
705-007	DX2e-40LP 2 loop Fire Alarm Control Panel with internal printer.
705-014	DX2e-40MF 2 loop Fire Alarm Control Panel. Flush mounting.
705-015	DX2e-40MPF 2 loop Fire Alarm Control Panel with internal printer. Flush mounting.
705-016	DX2e-40LF 2 loop Fire Alarm Control Panel. Flush mounting.
705-017	DX2e-40LPF 2 loop Fire Alarm Control Panel with internal printer. Flush mounting.

Accessories

795-083	Keyswitch Kit
797-067	Bezel kit for DX2e-40M, -40MP
797-068	Bezel kit for DX2e-40L, -40LP
795-085	Internal printer kit
070-010	Printer paper roll
709-601-001	ZXr-A Active Repeater
709-701-001	ZXr-P Passive Repeater
795-082	Engineers SPK (Software Programming Kit)
795-080	PC Interface Lead for programming all Morley-IAS control panels

Note: * Maximum available current will be dependent on full control panel loading

** Only one protocol can be selected within the control panel.

Charles Avenue
 Burgess Hill
 West Sussex
 RH15 9UF UK

T: +44 (0) 1444 23 55 56
 F: +44 (0) 1444 25 44 10
 E: sales@morleyias.co.uk
 www.morley-ias.co.uk