

Features

- Complies with EN54 part 2 and part 4
- 40 fire zone LED indicators
- 2 independent sounder circuits
- 500mA Universal Loop Drivers
- Supports Apollo (Xplorer, XP95 and Discovery), Hochiki (ESP), Morley-IAS & System Sensor
- 7 day timers
- Day/Night mode switching
- Onboard monitored inputs
- Programmable user function keys
- Event logging
- Onboard diagnostics
- User access restriction
- All metal enclosure
- Plug-in connectors
- Optional internal printer
- PC configuration software (optional)

The Dimension series of intelligent multi protocol fire alarm control panels from Morley-IAS Fire Systems have been developed based on two concepts - **simplicity and reliability**.

DX4e

4 loop multi protocol
intelligent fire alarm
control panel

Data Sheet

Simply, fix the control panel to the wall, connect the field wiring and everything else is configured in the software. Even programming the control panel is simple. No computer is required and it only takes a few key presses to have a working fire alarm system. First, set the protocol for the loop devices. Second, "Autolearn" the panel and finally, "Reset" the panel. The control panel is now protecting the building.

The Dimension series provides additional features allowing:- programmable text messages to identify the exact location of each field device, a class change input for schools, coincidence and verification detection (false alarm management), sensitivity adjustment (between day and night), programmable function buttons, input/output logic and extensive event logging. A feature rich fire alarm control panel constructed from high specification components to help both the installer and the end user.

The Dimension series is especially suited to offices, retail units, health centres, leisure facilities, cinemas and hotels to name but a few applications. A compact, high performance, economical fire alarm control panel for the protection of medium sized buildings.



by Honeywell



Mechanical

Dimensions (H x W x D):

DX4e-40L 620 x 380 x 130 mm

DX4e-40LP 620 x 380 x 130 mm

Weight (Excluding batteries):

DX4e-40L(F) 9 Kg DX4e-40LP(F) 9.2 Kg

Material

1.2mm Zintec powder epoxy coated

Colour

RAL 9001 - Cool Grey

Knockouts


Top: 19 x M20 Bottom: 3 x M20.

Temperature

Operating: 0°C to +45°C Storage: 10°C to +55°C

Relative Humidity

5% to 95% non condensing.

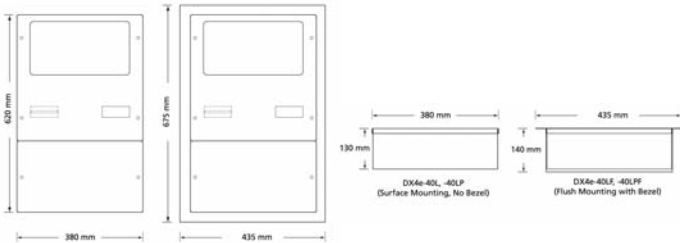

Electrical

Operating voltage

230Vac (+10%, -15%) 50-60 Hz

PSU Rating

DX4e-40L(F) 24 Vdc 4A DX4e-40LP(F) 24 Vdc 4A

Standby Batteries

DX4e-40L(F) 2 x 12AHr or 2 x 17AHr

DX4e-40LP(F) 2 x 12AHr or 2 x 17AHr

Auxiliary output*

+24 Vdc 250mA fused

Loop Capacity**

4 Loops, 500mA per loop

126 devices per loop, Apollo Protocols

126 devices per loop, Hochiki ESP Protocol

198 devices per loop, Morley-IAS Protocol

198 devices per loop, System Sensor Protocol

Output Relays

Fire relay: Single pole changeover 30Vdc 1A

Fault relay: Single pole changeover 30Vdc 1A

Aux relay: Programmable single pole changeover 30Vdc 1A

Onboard Inputs

Keyswitch: programmable for select functions

Input #1: programmable (monitored) for select functions

Input #2: programmable (monitored) for select functions

Data Ports

1 x RS 485 (Repeater connections) 1 x RS232 (PC Programming)

Sounder Circuits

2 output circuits, 1A available across both circuits.*

Fire System Compatibility

Morley-IAS is fully committed to offering practical solutions and supporting products that enhance your buildings control systems.

Other Supporting Products Include

- Morley-IAS Intelligent Public Address and Voice Alarm Equipment
- Morley-IAS ZX range of networkable analogue addressable Fire Alarm Panels
- Morley-IAS Dimension Analogue Addressable Panels
- Morley-IAS Horizon Conventional Panels
- Morley-IAS Extinguishing Panels

For further details on these or any other Morley-IAS product please contact your local distribution point, Morley-IAS Regional Sales Manager or via our contact details.

Morley-IAS by Honeywell a real choice for fire solutions, committed to supporting our device partners.



User Interface

Display

2 x 40 character backlit liquid crystal

Control keys

Sound Alarms, Silence/Resound, Mute Buzzer, Accept, Reset.

Programmable keys

2 independent programmable buttons and LED indicators.

Programming keys

12 button alpha numeric key pad and 4 cursor keys.

Indicators

Fire, Fault, Test, Disablement, Delayed Mode, Alarms Silenced, Buzzer Muted, Sounders Disabled, Relays Disabled, Power Supply Fault, CPU Fault, Sounder Fault and Earth Fault.

Zonal

40 Fire zones LED indicators.

Part Numbers

705-008	DX4e-40L 4 loop Fire Alarm Control Panel.
705-028	DX4e-40L-M 4 loop Fire Alarm Control Panel. Morley-IAS Protocol only.
705-009	DX4e-40LP 4 loop Fire Alarm Control Panel with internal printer.
705-018	DX4e-40LF 4 loop Fire Alarm Control Panel. Flush mounting.
705-019	DX4e-40LPF 4 loop Fire Alarm Control Panel with internal printer. Flush mounting.

Accessories

795-083	Keyswitch Kit
797-068	Bezel kit for DX4e-40L, -40LP
795-085	Internal printer kit
070-010	Printer paper roll
709-601-001	ZXr-A Active Repeater
709-701-001	ZXr-P Passive Repeater
795-082	Engineers SPK (Software Programming Kit)
795-080	PC Interface Lead for programming all Morley-IAS control panels

Note:*Maximum available current will be dependent on full control panel loading.
** Only one protocol can be selected within the control panel.

Charles Avenue
Burgess Hill
West Sussex
RH15 9UF UK

T: +44 (0) 1444 23 55 56
F: +44 (0) 1444 25 44 10
E: sales@morleyias.co.uk
www.morley-ias.co.uk